



www.elonginternational.com

R20 / R30 / R38 / R40 Flood



FE-R20

8,000 Hours

Part Number	Color temperature (K)	Watts	Incandescent Watts Comparison	Light Output (Lm)	M.O.L H(Inch)	Diameter D(Inch)	Base Width A(Inch)	Base Height B(Inch)	Carton Quantity (Unit)	2700K
FE-R20-14W	2700/5000	14	40	470	4.56	2.50	1.69	1.77	48	2700K



FE-R30-15W

8,000 Hours

Part Number	Color temperature (K)	Watts	Incandescent Watts Comparison	Light Output (Lm)	M.O.L H(Inch)	Diameter D(Inch)	Base Width A(Inch)	Base Height B(Inch)	Carton Quantity (Unit)	2700K
FE-R30-15W	2700/5000	15	65	750	5.47	3.70	2.05	2.36	48	2700K



FE-R38-20W

8,000 Hours

Part Number	Color temperature (K)	Watts	Incandescent Watts Comparison	Light Output (Lm)	M.O.L H(Inch)	Diameter D(Inch)	Base Width A(Inch)	Base Height B(Inch)	Carton Quantity (Unit)	2700K
FE-R38-20W	2700/5000	20	70	900	6.26	4.72	2.17	2.56	24	2700K




FE-R40

8,000 Hours

Part Number	Color temperature (K)	Watts	Incandescent Watts Comparison	Light Output (Lm)	M.O.L H(Inch)	Diameter D(Inch)	Base Width A(Inch)	Base Height B(Inch)	Carton Quantity (Unit)	2700K
FE-R40-20W	2700/5000	20	70	900	6.13	4.69	2.05	2.36	24	2700K

Part Number	Color temperature (K)	Watts	Incandescent Watts Comparison	Light Output (Lm)	M.O.L H(Inch)	Diameter D(Inch)	Base Width A(Inch)	Base Height B(Inch)	Carton Quantity (Unit)	2700K
FE-R40-23W	2700/5000	23	90	1200	6.13	4.69	2.05	2.36	24	2700K



Elong International USA Inc
 Address: 2425 McIver, Suite 150 Carrollton, TX 75006
 Contact
 Andy Liu 972-247-7996 (andymliu@gmail.com)
 Bill Long 214-751-2183 (bill.longstar@gmail.com)
 Fax : 972-247-7999



www.elonginternational.com

R30 / R40 Top-Flood



FE-RSF-20W

R30 8,000 Hours

Part Number	Color temperature (K)	Watts	Incandescent Watts Comparison	Light Output (Lm)	M.O.L H(Inch)	Diameter D(Inch)	Base Width A(Inch)	Base Height B(Inch)	Carton Quantity (Unit)
FE-RSF-20W	2700/4100/5000	20	90	1100	5.25	3.74	1.65	2.05	40

The brightest R30 floodlight in the market.




FE-RSF-30W

R40 8,000 Hours

Part Number	Color temperature (K)	Watts	Incandescent Watts Comparison	Light Output (Lm)	M.O.L H(Inch)	Diameter D(Inch)	Base Width A(Inch)	Base Height B(Inch)	Carton Quantity (Unit)
FE-RSF-30W	2700/4100/5000	30	120	1650	6.11	4.92	1.89	2.52	20

The brightest R40 floodlight in the market.

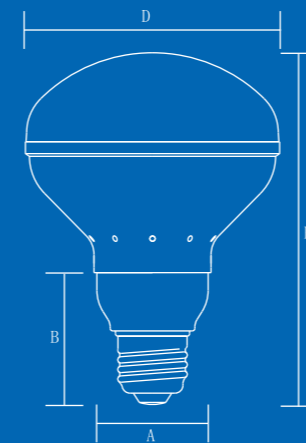

Elong International USA Inc
 Address: 2425 McIver, Suite 150 Carrollton, TX 75006
 Contact
 Andy Liu 972-247-7996 (andymliu@gmail.com)
 Bill Long 214-751-2183 (bill.longstar@gmail.com)
 Fax : 972-247-7999